




## Flowrox Filter Cloths for Tower Presses

### Flowrox Light-Duty

Cloth Type	Air permeability m <sup>3</sup> /m <sup>2</sup> min (200 Pa)	Areal weight g/m <sup>2</sup>	Thickness mm	Tensile strength kN/m lengthwise
W-TA117L	1,4	990	1,7	340
W-TA220L	3,0	940	1,6	350
W-TA221L	7,0	960	1,7	340
W-TA301L	19	960	1,7	310
W-TA410L	25	1000	1,7	310

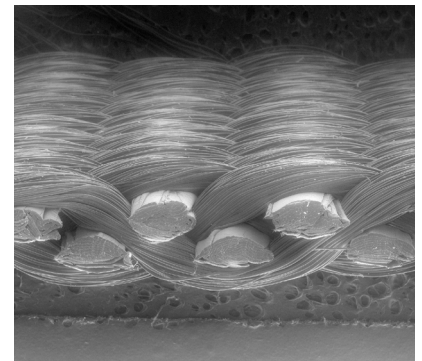

Flowrox W-TA220L filter cloth, electron microscope image.

### Flowrox Standard

Cloth Type	Air permeability m <sup>3</sup> /m <sup>2</sup> min (200 Pa)	Areal weight g/m <sup>2</sup>	Thickness mm	Tensile strength kN/m lengthwise
W-TA115	0,2	1100	1,8	370
W-TA117	1,0	1100	1,8	370
W-TA220	2,6	1100	1,8	370
W-TA221	5	1100	1,8	350
W-TA223	5	1100	1,8	350
W-TA300	6	1000	1,8	350
W-TA301	7	1100	1,8	340
W-TA302	10	1100	1,8	340
W-TA410	16	1100	1,8	340

### Flowrox Heavy-Duty

Cloth Type	Air permeability m <sup>3</sup> /m <sup>2</sup> min (200 Pa)	Areal weight g/m <sup>2</sup>	Thickness mm	Tensile strength kN/m lengthwise
W-TA221H	4	1200	2,05	440
W-TA301H	12	1200	2,05	430
W-TA410H	14	1200	2,05	400

### GLOBAL AVAILABILITY

Headquarters, Finland: Flowrox Oy  
Tel: +358 201 113 311  
sales@flowrox.com

Africa: Flowrox (Pty) Ltd  
Tel: +27 81 030 1015  
sales-rsa@flowrox.com

Australia: Flowrox PTY LTD  
Tel: +61 2 9114 9715  
sales-au@flowrox.com

North America: Flowrox Inc  
Tel: +1 410 636 2250  
sales-us@flowrox.com

South America:  
Flowrox SpA  
Tel: +56 2 3224 9704  
sales-chile@flowrox.com

Flowrox SAC  
Tel: +51 9 7973 5424  
sales-peru@flowrox.com

Russia & CIS: Flowrox LLC  
Tel: +7 495 726 57 41  
sales-ru@flowrox.com

Information without engagement. All rights to changes without prior notice reserved.



Flowrox Oy  
P.O. Box 338  
FI-53101 Lappeenranta, Finland  
Tel. +358 201 113 311

www.flowrox.com  
info@flowrox.com

