




Flowrox Filter Cloths for Tower Presses

Flowrox Light-Duty

Cloth Type	Air permeability m ³ /m ² min (200 Pa)	Areal weight g/m ²	Thickness mm	Tensile strength kN/m lengthwise
W-TA117L	1,4	990	1,7	340
W-TA220L	3,0	940	1,6	350
W-TA221L	7,0	960	1,7	340
W-TA301L	19	960	1,7	310
W-TA410L	25	1000	1,7	310

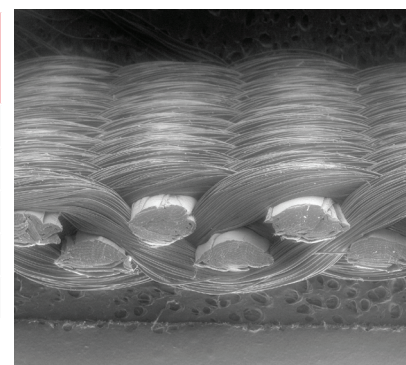

Flowrox W-TA220L filter cloth, electron microscope image.

Flowrox Standard

Cloth Type	Air permeability m ³ /m ² min (200 Pa)	Areal weight g/m ²	Thickness mm	Tensile strength kN/m lengthwise
W-TA115	0,2	1100	1,8	370
W-TA117	1,0	1100	1,8	370
W-TA220	2,6	1100	1,8	370
W-TA221	5	1100	1,8	350
W-TA223	5	1100	1,8	350
W-TA300	6	1000	1,8	350
W-TA301	7	1100	1,8	340
W-TA302	10	1100	1,8	340
W-TA410	16	1100	1,8	340

GLOBAL AVAILABILITY

Headquarters, Finland: Flowrox Oy
Tel: +358 201 113 311
sales@flowrox.com

Africa: Flowrox (Pty) Ltd
Tel: +27 81 030 1015
sales-rsa@flowrox.com

Australia: Flowrox PTY LTD
Tel: +61 2 9114 9715
sales-au@flowrox.com

North America: Flowrox Inc
Tel: +1 410 636 2250
sales-us@flowrox.com

South America:
Flowrox SpA
Tel: +56 2 3224 9704
sales-chile@flowrox.com

Flowrox SAC
Tel: +51 9 7973 5424
sales-peru@flowrox.com

Russia & CIS: Flowrox LLC
Tel: +7 495 726 57 41
sales-ru@flowrox.com

Flowrox Heavy-Duty

Cloth Type	Air permeability m ³ /m ² min (200 Pa)	Areal weight g/m ²	Thickness mm	Tensile strength kN/m lengthwise
W-TA221H	4	1200	2,05	440
W-TA301H	12	1200	2,05	430
W-TA410H	14	1200	2,05	400

Information without engagement. All rights to changes without prior notice reserved.



Flowrox
P.O. Box 338
FI-53101 Lappeenranta, Finland
Tel. +358 201 113 311

www.flowrox.com
info@flowrox.com

