



Flowrox CF-S Centrifugal Pump

The Smart Alternative

Flowrox CF-S is a centrifugal pump designed for the continuous pumping of extremely abrasive and corrosive slurries. Wear-resistant components are made to withstand heavy-duty conditions.

Flowrox Digital Services are a new way to combine your flow control products and Industrial Internet of Things (IIoT). They increase your productivity through optimization and online predictability.


The pump handles lower flows 2.3 m³/h through excess of 4 000 m³/h. A single Flowrox CF-S centrifugal pump can reach heads higher than 76 m and has a good ratio between efficiency and wear. The construction of the Flowrox CF-S pump is based on split-case and it includes a range of liner material options for optimal performance.



Flowrox CF-S centrifugal pump is fit for various pumping applications of corrosive and abrasive slurries.

Basic Selection

Flowrox CF-S centrifugal pump hydraulic coverage. All models are available with elastomer and chrome alloy impellers.

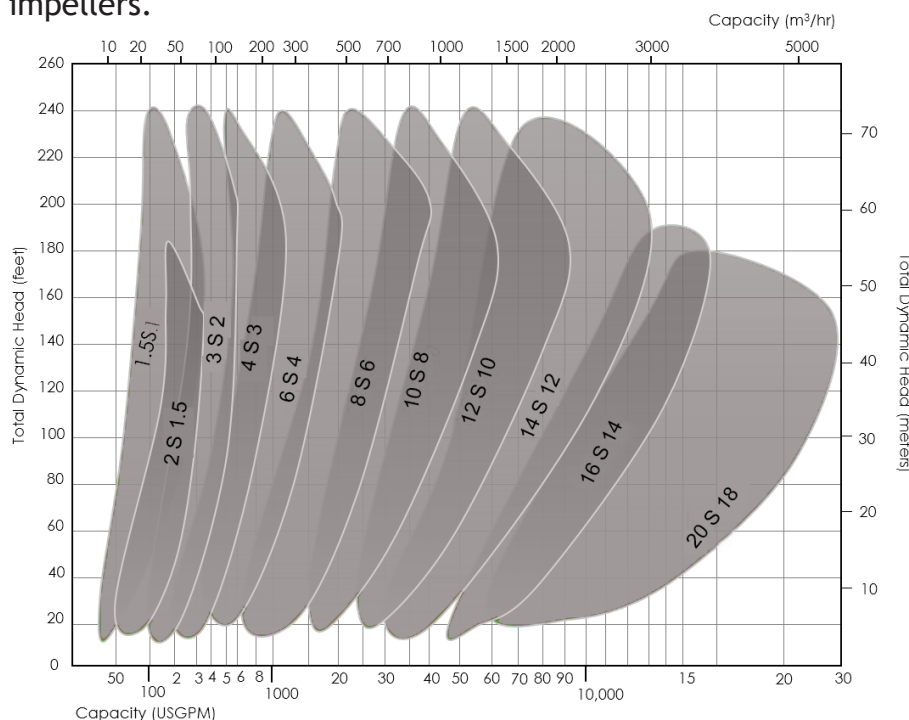

Maximum working pressure: Elastomer - 170 psi (1172 kPa).
 Chrome iron - 300 psi (2068 kPa)

Design features

Heavy-duty construction



Wide range of material options



Interchangeable metal and moulded elastomer wear parts



Split case design for ease of maintenance



Reduced shaft deflection, increased packing life

Material Selection

	Liners	Impellers	Expeller	Stuffing Box Expeller Ring	Shaft Sleeve	Seals	Casing	Base
Standard	Chrome Alloy* Natural Rubber	Chrome Alloy* Natural Rubber	Chrome Alloy*	Chrome Alloy*	420C SS	Rubber Nitrile	Ductile Iron	Ductile Iron
Options	Other Alloys Neoprene Butyl EPDM Hypalon Nitrile	Other Alloys Neoprene Butyl EPDM Hypalon Nitrile	Ductile Iron	Natural Rubber Ductile Iron Ferralium 316 SS	304 SS/316 SS NCB-316 SS Hastelloy C Hard Coatings			


*Standard Chrome Alloy: ASTM A532 Class III Type A - 27% Cr, 650BHN; Alternatives available for highly corrosive services.

Flowrox CF-S Centrifugal Pumps

Base Model	Bearing Assembly	Nominal Suc- tion x Dis- charge inches (mm)	Nominal Impeller* Diameter (mm)	Solid Sphere Passing, Ø* (mm)	Impeller* Materials	Liner Materials
1.5S1	B	1.5x1 (40x25)	152	14	Chrome Iron(s) and Elastomer(s) Available NOTE: Open face, large particle and specialized impellers available upon request	Chrome Iron(s) and Elastomer(s) Available
2S1.5	B	2x1.5 (50x40)	184	19		
3S2	C	3x2 (75x50)	214	25		
4S3	C, D	4x3 (100x75)	245	36		
6S4	D, E	6x4 (150x100)	365	51		
8S6	E, F	8x6 (200x150)	510	63		
10S8	F, S	10x8 (250x200)	686	76		
12S10	S, G	12x10 (300x250)	762	86		
14S12	S, G, T	14x12 (350x300)	965	90		
16S14	G, T	16x14 (400x350)	1067	135		
20S18	T	20x18 (500x450)	1370	130	Chrome Iron	

*Standard impeller (typically five vane, chrome iron, closed face)

Bearing Assembly Ratings

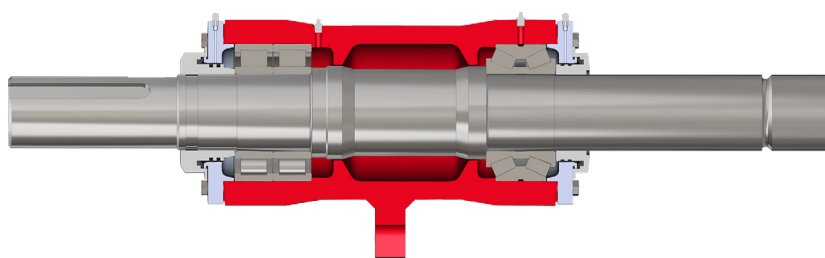

Grease-lubricated cartridge bearing assembly.
Extended bearing life with oversized shaft diameters and bearings.
Highest quality name brand tapered-roller and roller bearings.
Safe and simple single-point impeller adjustment to maintain peak efficiency.

Type	Standard (kW)	High Capacity (kW)
B	15	N/A
C	30	55
D	60	110
E	120	225
R	300	N/A
F	260	425
S	560	N/A
G	600	900
T	1200	N/A



Flowrox Oy
P.O. Box 338
FI-53101 Lappeenranta, Finland
Tel. +358 201 113 311

www.flowrox.com
info@flowrox.com

