


## FLOWROX PINCH VALVE MODEL SELECTION GUIDE

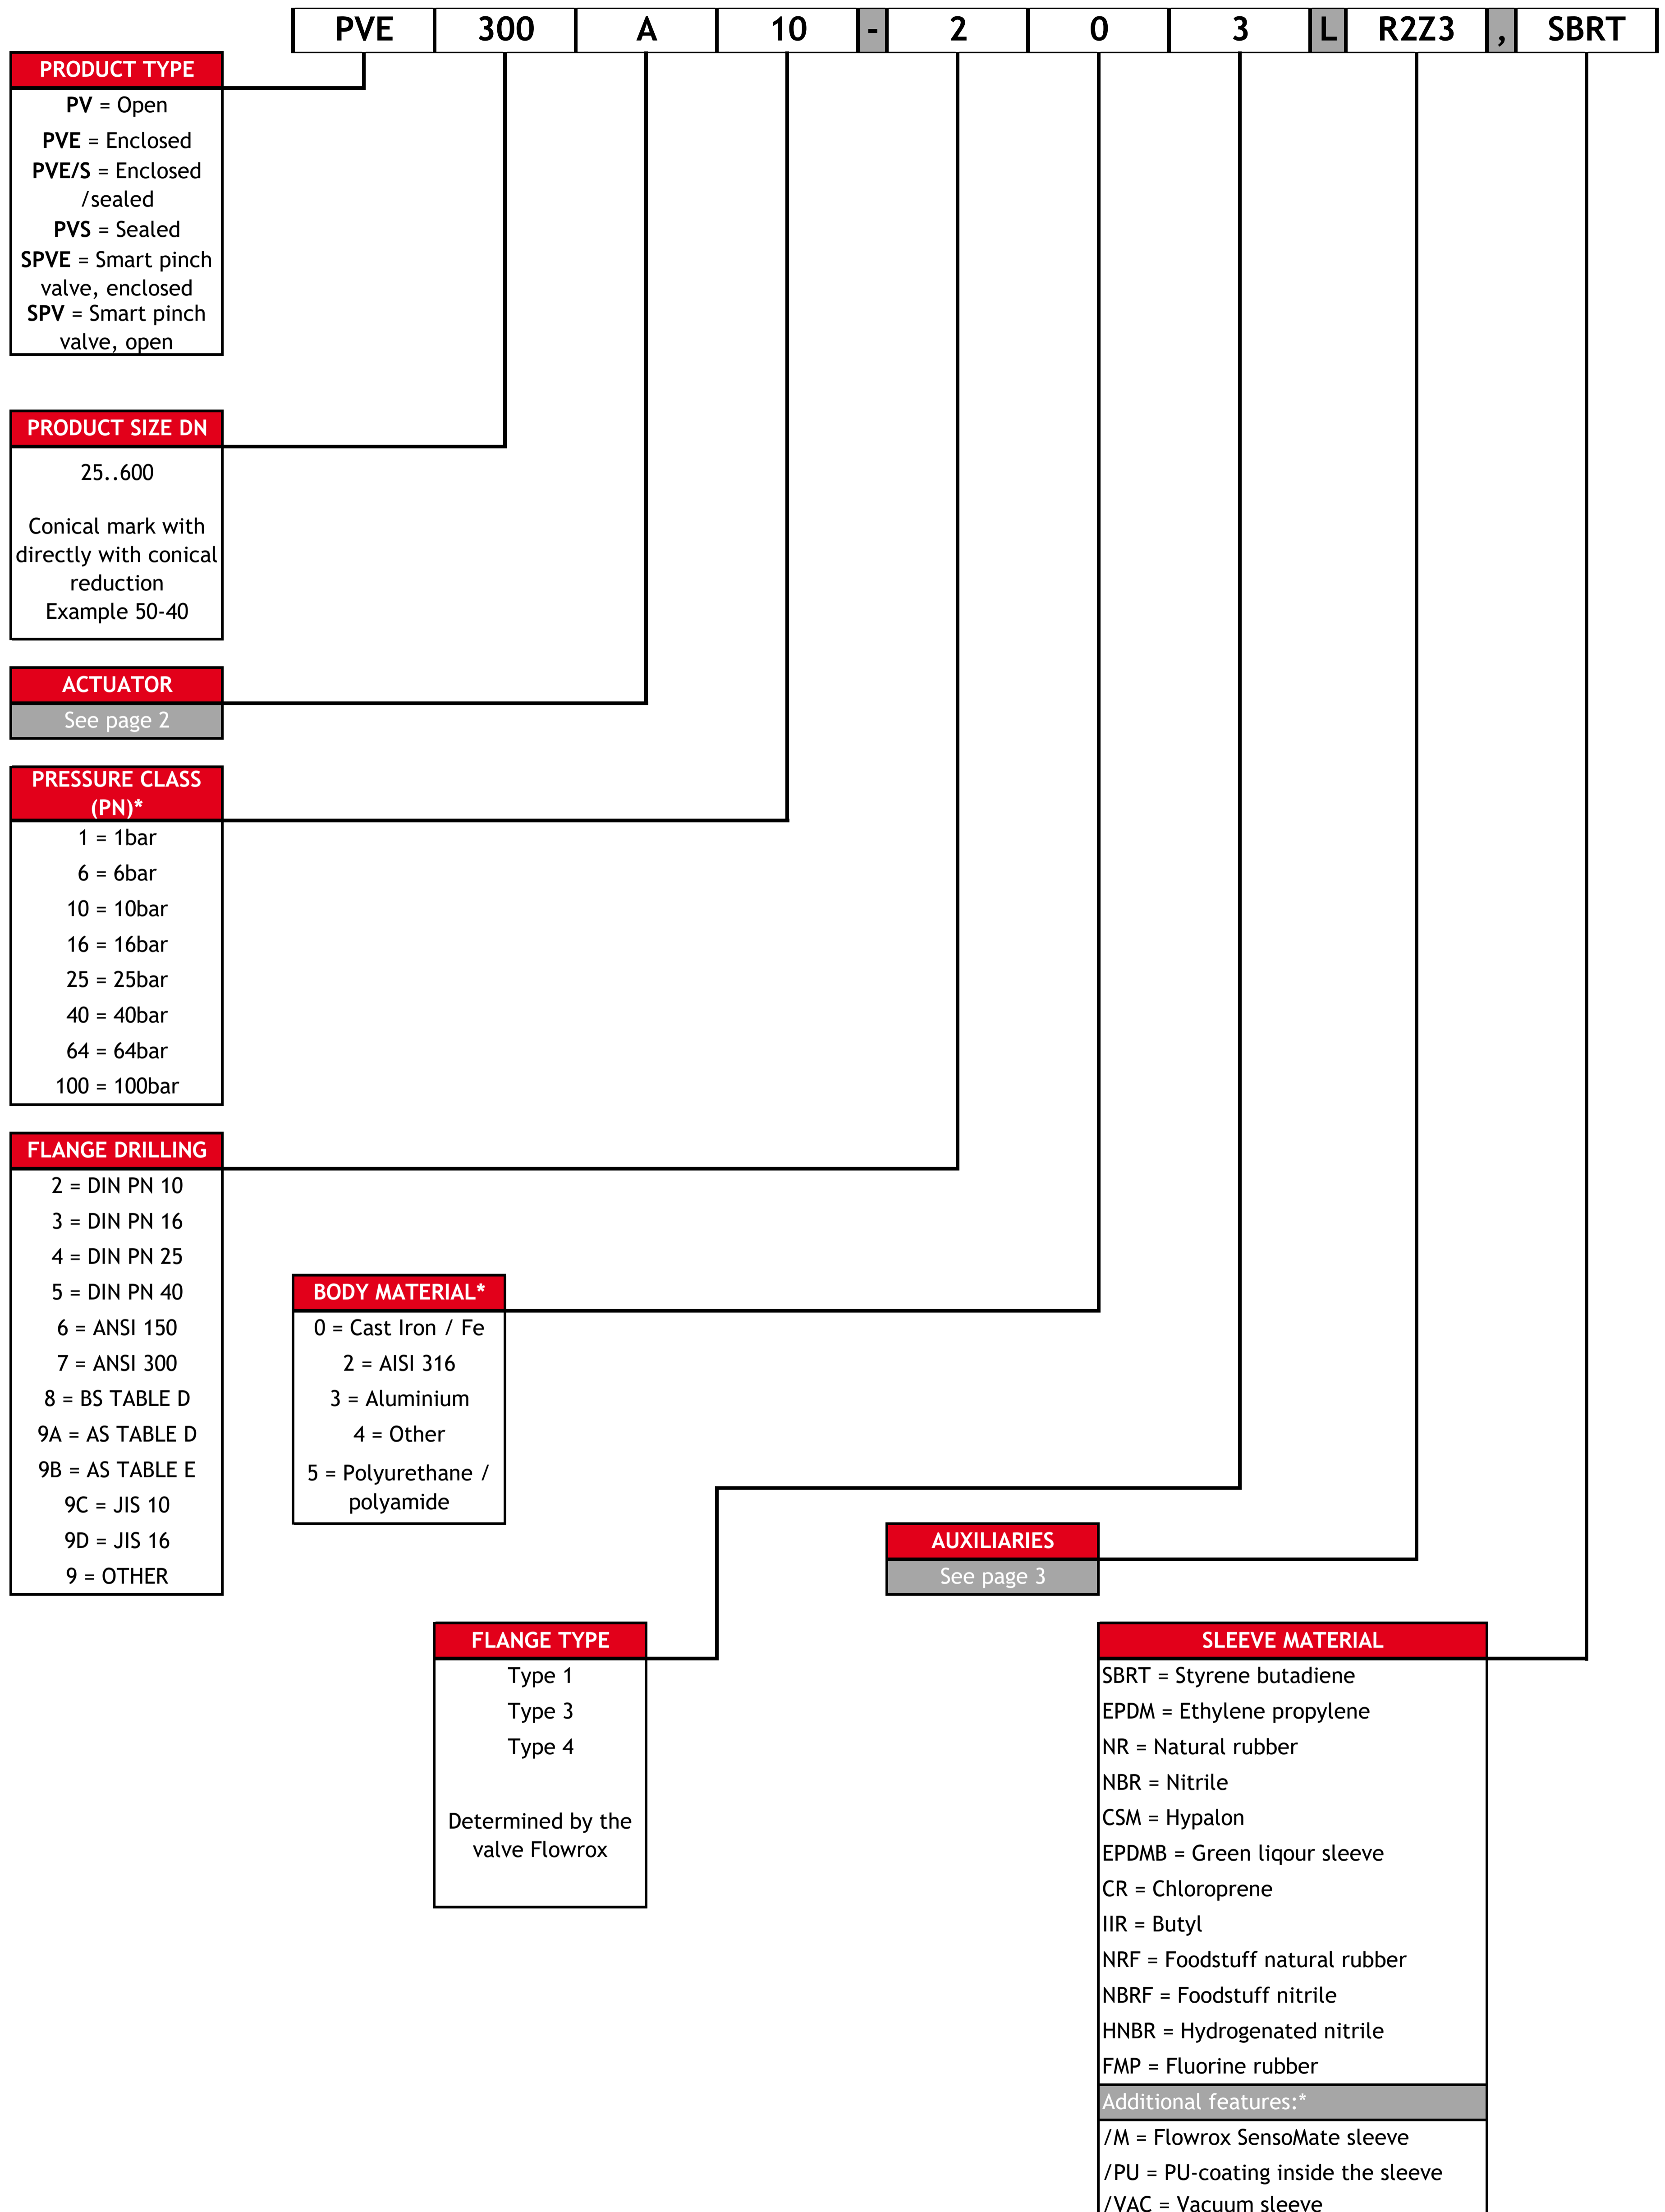

\* Some restrictions apply. Contact Flowrox.

## PINCH VALVE ACTUATORS

AKU1C PNEUMATIC				EB ELECTRIC		H HYDRAULIC	MG MANUAL
CYLINDER	MANUAL OVERRIDE	POSITIONER	OPTIONS	TYPE	VOLTAGE RANGE	TYPE	TYPE
A= Pneumatic cylinder	BLANK=NONE	BLANK=NONE	BLANK=NONE	E = Electric On-Off AUMA Norm	BLANK= 400V/50hz	H = Hydraulic	M = Manual handwheel
A1S = Pneumatic with stainless piston rod, tie rods and painted cylinder	B = Manual override	K = Positioner Flowrox Standard Neles DN9000 series	U1C= With pneumatic spring FAIL CLOSE	EP = Electric On-Off with feedback unit EWG 01.1, AUMA	B = 380V/50hz		MG = Manual with bevel gear
A2S = Pneumatic "Stainless" no painting		KF = With integrated (Festo DFPI) positioner a)	U10= With pneumatic spring FAIL OPEN	ES = Electric On-Off AUMA-Matic	C = 440V/50hz		
		KL = Positioner with special auxiliaries or other brand than Flowrox Selected Standard	U2C= With pneumatic spring (Pressure switch) FAIL CLOSE c)	EO = Electric On-Off with positioner, Aumatic	D = 525V/50hz		
		KT = Position feedback from cylinder mounted transmitter b)	U20= With pneumatic spring (Pressure switch) FAIL OPEN c)	EL = Electric On-Off	E = 460V/60hz		
			VC = With mechanical spring FAIL CLOSE				
			VO = With mechanical spring FAIL OPEN				

a) KF option cannot be used with cylinder type A1S, A2S or Manual override.

b) KT option Available soon.

c) U2C/U20 not available for positioners.

## PINCH VALVE AUXILIARIES

MARKING	DESCRIPTION	EXTRA INFO	APPLICABLE ACTUATOR
<b>B</b>	Pressure Booster in air supply	Pressure booster determined by Flowrox, used to increase the supply air pressure to secure enough force for pneumatic cylinder.	PNEUMATIC
<b>F</b>	Filter Regulator + gauge	Filter Regulator + Gauge Flowrox selected model.	PNEUMATIC
<b>H</b>	Hydraulic Handpump (For Hydraulic only)	Manual hydraulic handpump for hydraulic actuators H only.	HYDRAULIC
<b>J1</b>	Junction box small (Flowrox Standard)	Junction box small, for limit switches or solenoid valve, IP66, plastic, 2 pcs M12x1.5 and 1 pc M20x1.5, pre-wired.	ANY
<b>J2</b>	Junction box large (Flowrox Standard)	Junction box large, for limit switches and solenoid valve, IP66, plastic, 4 pcs M12x1.5 and 1 pc M20x1.5, pre-wired.	ANY
<b>J4</b>	Junction Box (Non-Standard)	Junction box out of Flowrox standard scope specification clarified on the proposal and under valve serial number.	ANY
<b>Q</b>	Quick exhaust valve	Quick exhaust valve to maximize the speed of cylinder.	PNEUMATIC
<b>R</b>	Readiness for ind. Limit switches	Readiness for d18mm inductive limit switches.	ANY
<b>R1</b>	AC/DC (18mm cylindrical switch) (Flowrox Standard)	AC/DC,2-wire type,(24...240VAC / 24...240VDC) Flowrox selected model	ANY
<b>R2</b>	DC, NPN (18mm cylindrical switch) (Flowrox Standard)	DC,3-wire type, PNP (12...24V) Flowrox selected model	ANY
<b>R3</b>	DC, NPN (18mm cylindrical switch)(Flowrox Standard)	DC,3-wire type, NPN (12...24V) Flowrox selected model	ANY
<b>R5</b>	Limit switch (Non-Standard)	Limit switch out of Flowrox standard scope specification clarified on the proposal and under valve serial number.	ANY
<b>S</b>	Magnetic limit switches (Flowrox Standard)	Magnetic limit switches, attached to aluminium pneumatic cylinder actuators. Cylinder fitted with magnetic piston.	PNEUMATIC
<b>T</b>	Mechan. Limit switches (Flowrox Standard)	Mechanical limit switches Flowrox selected model	ANY
<b>Z1</b>	Solenoid valve, 24VDC, Monostable (Flowrox Standard)	Solenoid valve 24 VDC (for pneumatic actuator) with necessary tubing Flowrox selected model, <b>monostable (Single coil)</b> .	PNEUMATIC
<b>Z1B</b>	Solenoid valve, 24VDC, Bistable (Flowrox Standard)	Solenoid valve 24 VDC (for pneumatic actuator) with necessary tubing Flowrox selected model, <b>Bistable (Double coil)</b> .	PNEUMATIC
<b>Z2</b>	Solenoid valve, 230V, 50/60Hz, Monostable (Flowrox Standard)	Solenoid valve 230V - 50/60Hz (for pneumatic actuator) with necessary tubing Flowrox selected model, <b>monostable (Single coil)</b> .	PNEUMATIC
<b>Z2B</b>	Solenoid valve, 230V, 50/60H, Bistable (Flowrox Standard)	Solenoid valve 230V - 50/60Hz (for pneumatic actuator) with necessary tubing Flowrox selected model, <b>Bistable (Double coil)</b> .	PNEUMATIC
<b>Z3</b>	Solenoid valve, 110V, 50/60Hz, Monostable (Flowrox Standard)	Solenoid valve 110V, 50/60Hz (for pneumatic actuator) with necessary tubing Flowrox selected model, <b>monostable (Single coil)</b> .	PNEUMATIC
<b>Z3B</b>	Solenoid valve, 110V, 50/60Hz,Bistable (Flowrox Standard)	Solenoid valve 110V, 50/60Hz (for pneumatic actuator) with necessary tubing Flowrox selected model <b>Bistable (Double coil)</b> .	PNEUMATIC
<b>Z5</b>	Solenoid valve, 24VDC, Monostable (Non-Standard)	24 VDC <b>monostable (Single coil)</b> solenoid valve out of Flowrox standard scope specification clarified on the proposal and under valve serial number.	PNEUMATIC
<b>Z5B</b>	Solenoid valve, 24VDC, Bistable (Non-Standard)	24 VDC <b>Bistable (Double coil)</b> solenoid valve out of Flowrox standard scope. To be specified on the proposal and under valve serial number.	PNEUMATIC
<b>Z6</b>	Solenoid valve, 230V, 50/60Hz, Monostable (Non-Standard)	230V 50/60Hz <b>monostable (Single coil)</b> solenoid valve out of Flowrox standard scope. To be specified on the proposal and under valve serial number.	PNEUMATIC
<b>Z6B</b>	Solenoid valve, 230V, 50/60H, Bistable (Non-Standard)	230V 50/60Hz <b>Bistable (Double coil)</b> solenoid valve out of Flowrox standard scope. To be specified on the proposal and under valve serial number.	PNEUMATIC
<b>Z7</b>	Solenoid valve, 110V, 50/60Hz, Monostable (Non-Standard)	110V 50/60Hz <b>monostable (Single coil)</b> solenoid valve out of Flowrox standard scope. To be specified on the proposal and under valve serial number.	PNEUMATIC
<b>Z7B</b>	Solenoid valve, 110V, 50/60Hz,Bistable (Non-Standard)	110V 50/60Hz <b>Bistable (Double coil)</b> solenoid valve out of Flowrox standard scope. To be specified on the proposal and under valve serial number.	PNEUMATIC
<b>X</b>	Must be specified	Additional auxiliary equipment not listed.	ANY